

LPA Concepts

LINEAR POWER DRIVER AMPLIFIER	LPA-LPD2-005AA-1000M-2000M-28-00
P3460	
FEATURES ◆ 1000-2000MHz ◆ Gain: 37 dB / $P_{1dB} = 5W$ ◆ OIP3 = +47dBm ◆ 50Ω input / output ◆ 28V / 650mA ◆ Aluminum flange	PACKAGE LPD2 package APPLICATIONS ◆ Instrumentation ◆ General purpose
BLOCK DIAGRAM	

Specifications and information are subject to change without notice

LPA Concepts

Electrical characteristics: 50 ohms; +28V; -25°C to +80°C (1, 2)

Ref	Parameter	Conditions	Note	Min	Typ	Max	Units
1	Bandwidth			1000		2000	MHz
2	Gain small signal	1500 MHz; 50°C			37		dB
3	Gain variation vs frequency	1000 MHz - 2000 MHz			1	2	dBpp
4	Gain variation vs temperature	-25°C to +80°C	2		3		dB
5	Input return loss	50 ohms				-14	dB
6	Output return loss	50 ohms				-14	dB
7	P-1dB	1-2GHz		5	5.5		W
8	Peak envelope power	IMD3 = -30 dBc, f=1500 MHz	3	5	6		W
9	Output 3 rd order intercept point	2 tones +18dBm each			+47		dBm
10	Current consumption	Pout < 1W			0.65		A
11	Max current	Shut down current			1.1		A

1. Unless otherwise specified
2. Housing temperature
3. 2 CW, tone spacing 5MHz

Maximum ratings

Ref	Parameter	Conditions	Note	Min	Nom	Max	Units
1	Operating temperature	flange temperature		-40°C		+80	°C
2	Supply voltage			24	28	32	V
3	Input peak power					+8	dBm
4	Input average power					+8	dBm
5	Max load VSWR	at 5W output			10:1		

Power Supply DC Connection

Pin description			
Terminal 2 : Supply +28V		SMD LOOP TERMINAL	3.3mm x 1.85mm x 2.0mm
Terminal 1 : Gnd			


Specifications and information are subject to change without notice

LPA Concepts

Mechanical characteristics

Ref	characteristic	description	remarks
1	Package dimensions	66mm x 42mm x 11mm	
2	Flange dimensions	66mm x 42mm x 5mm	4 x M3 screws for heatsink attach
3	Input/output RF connectors	SMA	
4	DC supply connection	SMD Loop terminal	For hook clip (Micrograbber or equivalent)
5	Weight	60 grams	

Package outline:

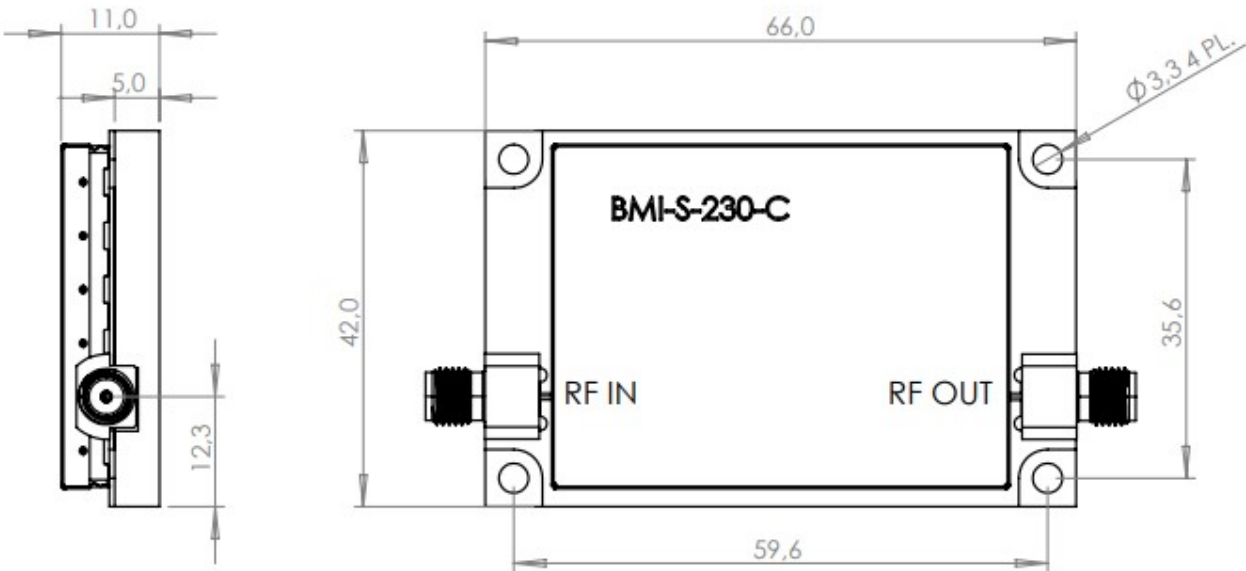


dimensions are in mm

Specifications and information are subject to change without notice

LPA Concepts


TYPICAL PERFORMANCE

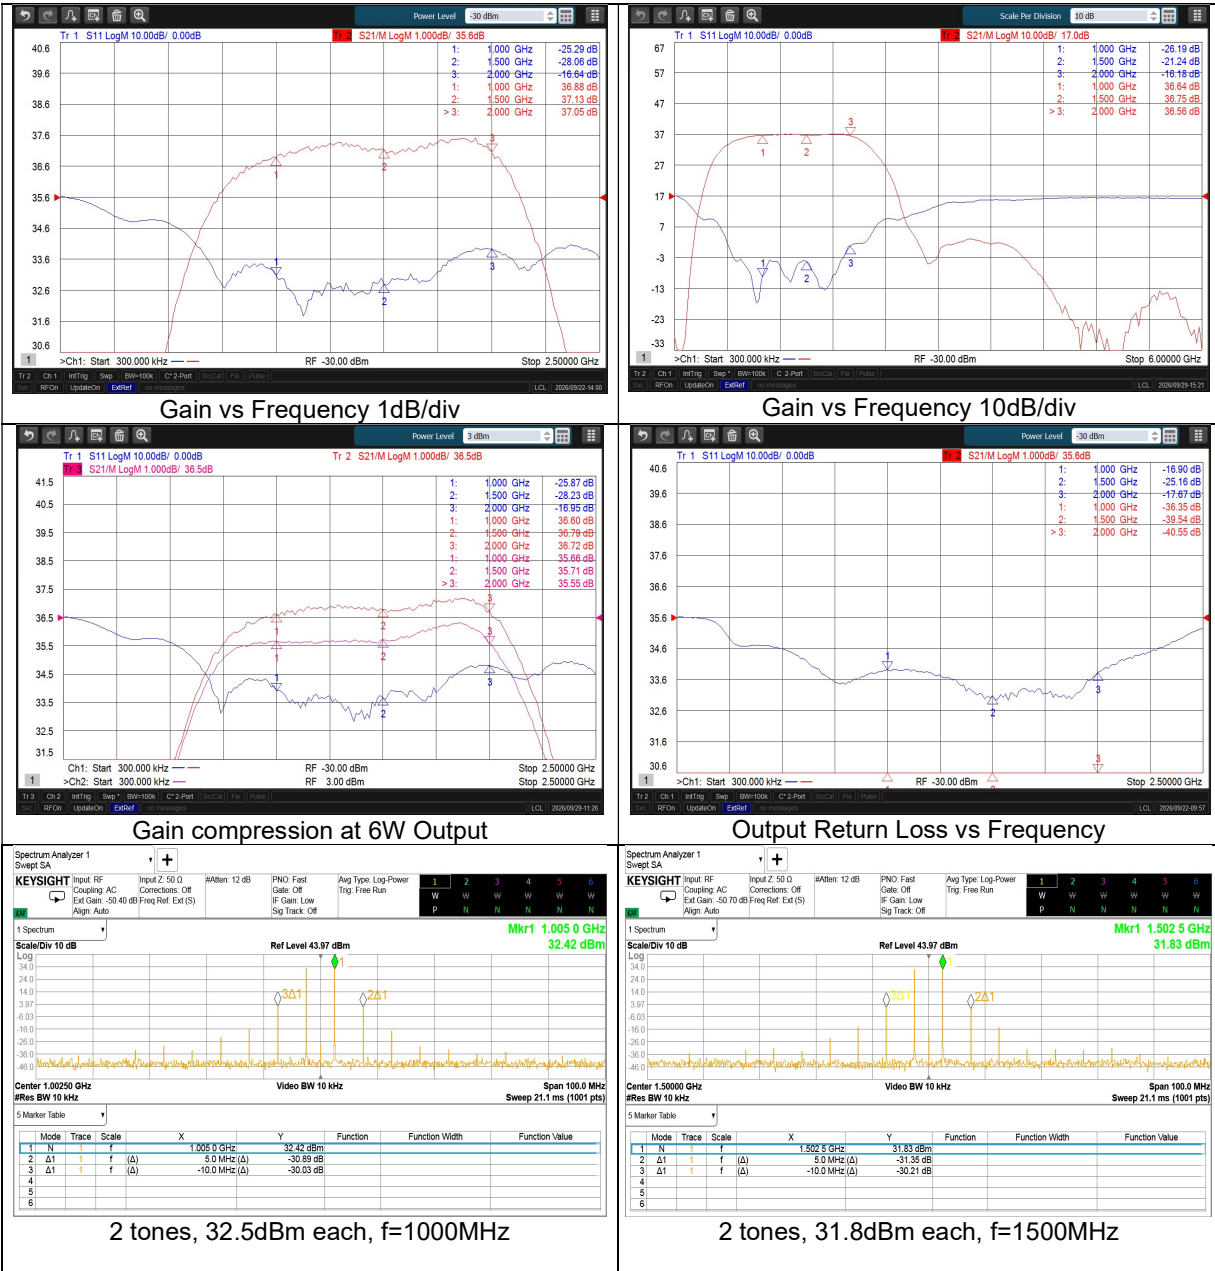

Specifications and information are subject to change without notice

LPA Concepts

TYPICAL PERFORMANCE (continued)

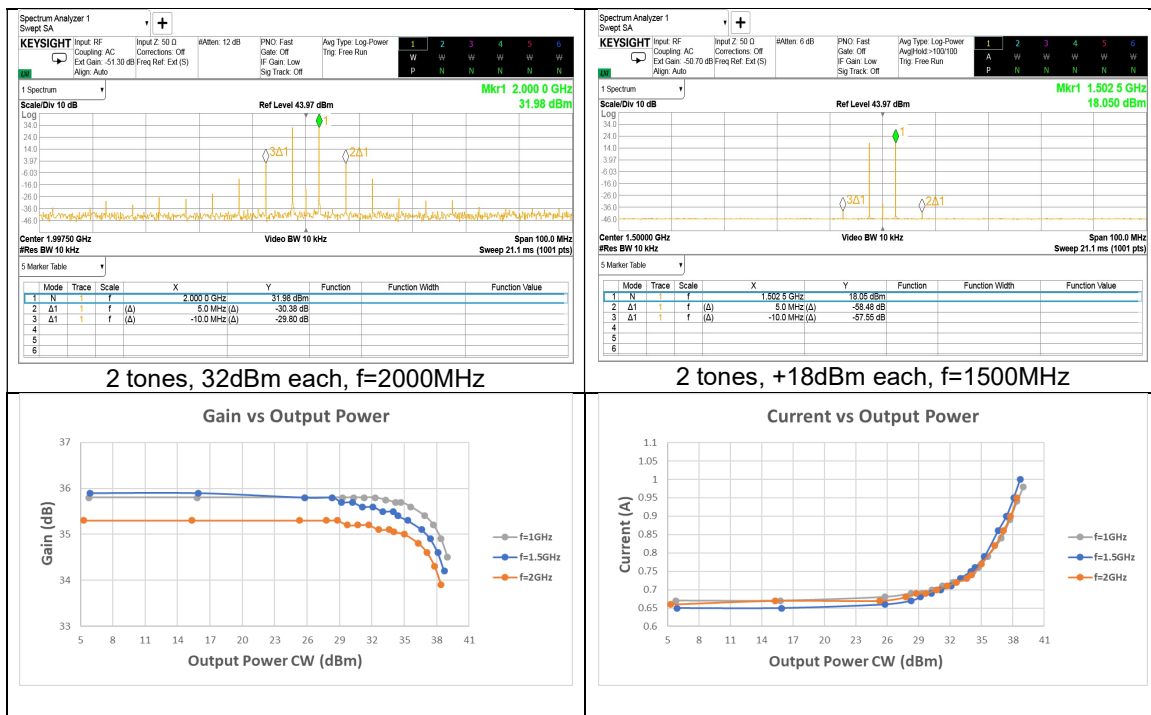

Specifications and information are subject to change without notice